

TRONE

#A2ETBCERN-12.WH

AQUATINA II

Smart Electronic
Bidet Toilet

INSTALLATION
MANUAL



Thank you for choosing Trone!

Please read and follow the installation instructions below fully and completely during installation. Do not discard this manual and keep it in a secure location for future questions or maintenance.

WARNING

Improper use of this Electronic Toilet Bidet Combo may result in serious injury or death. Do not use in a wet or damp place, such as a shower or sauna, as it may cause electric shock. This Electronic Toilet Bidet Combo should only be plugged into a grounded 120V GFCI protected outlet to prevent electrical shock. Do not use a damaged plug or cord or insert into a faulty outlet to prevent fire or personal harm.

CAUTION

Improper use of this product may result in personal injury or property damage. Always follow these installation instructions. Improper installation may result in water damage, electrical shock, or fire.

PREPARATION

Before installation begins, please confirm that you have the materials indicated below:

INCLUDED



Electronic Bidet



Remote



Installation Manual



Wax Ring



Closet Flange
and Bolts



Angle Valve



Reducer and
Coupling



Spanner
Wrench




Battery

NOT INCLUDED

3/8" x 1/2" water supply line

TOILET INSTALLATION

INSTALLATION CONDITIONS

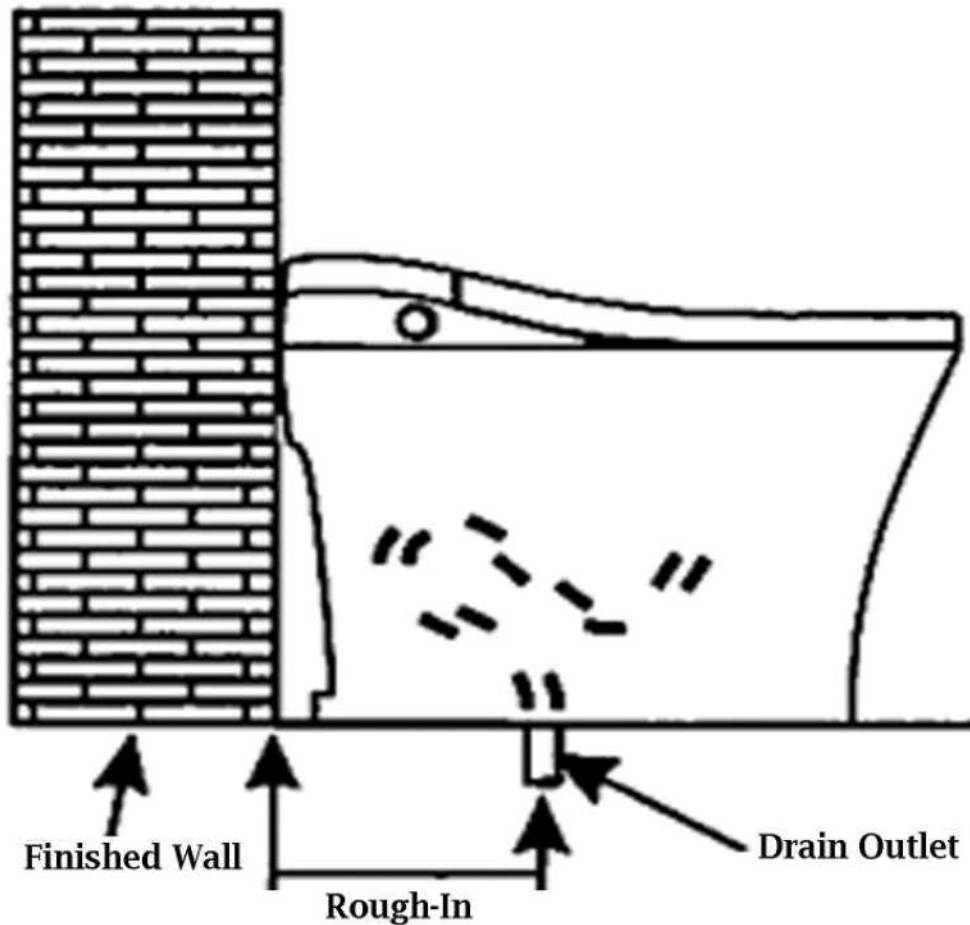


Please check that the construction of the walls and the floors in the bathroom is complete. Ensure that there is enough space for sewage, electric wires, and water lines. Identify the rough-in first by measuring the distance from the centerline of the closet flange to the finished wall. The water pressure should also be within the range of 14.5 PSI (dynamic) to 108.78 PSI (static) while the water supply temperature should be within the range of 41 to 95 degrees Fahrenheit.


The water inflow should be greater than 18 liters per minute otherwise, installation may not be performed.

INSTALLING THE TOILET


1. Place the wax ring over the closet flange making sure it is centered, with the flange down. Install the closet bolts.
2. Remove the Electronic Bidet Seat by pulling upwards firmly on the back of the seat until it releases.

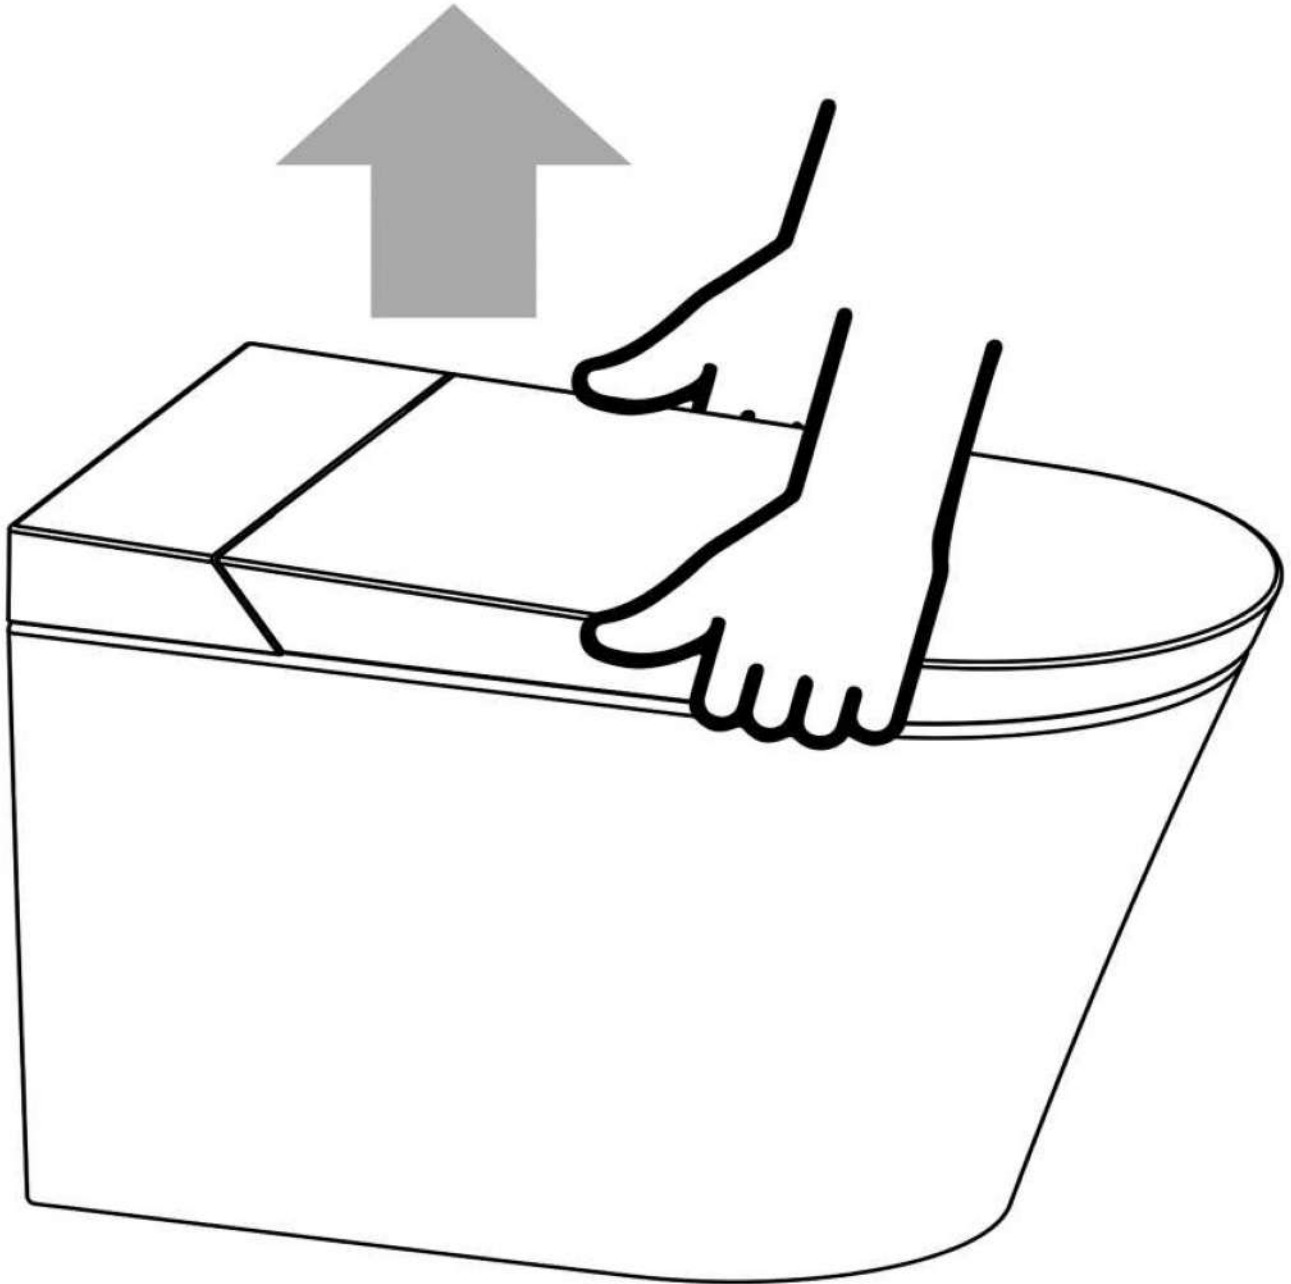

3. Gently set the Bidet Seat across the toilet bowl and out of the way as much as possible.
 4. Lift the entire electronic toilet bidet unit and place it over the wax ring. (TRONE Recommends using two people to lift and set this toilet).
 5. Line up the holes in the bottom of the bowl with the Closet Bolts previously installed in the Closet Flange and set the bowl gently in place.
 6. Place the included Closet Washers over the Closet Bolts and hand tighten the Nuts in place.
 7. Secure the Bowl in place by tightening the nuts down, alternating from side to side using a ratchet wrench or similar.
- *Do not over tighten as you may crack the porcelain/base. If there is still movement once tightening is done, shims may need to be used to account for an unlevelled floor.

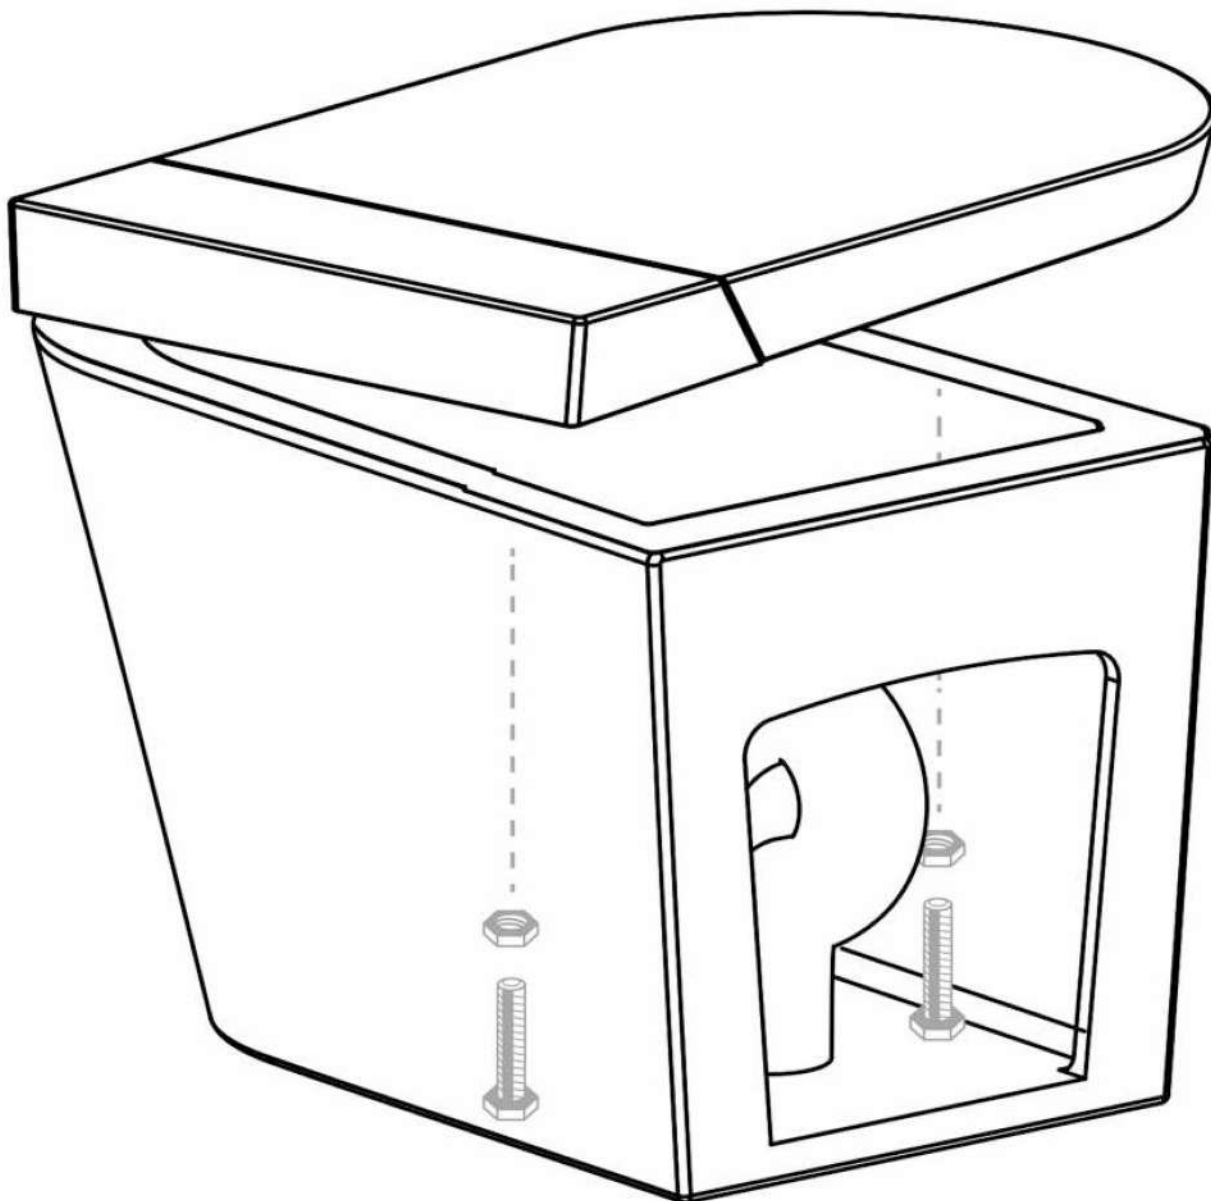


8. Double check all water lines are properly connected.
9. Double check the battery back up is hooked together.
10. Replace the Bidet Seat by lining up and inserting the seat pegs back into the designated holes they were in for step #2

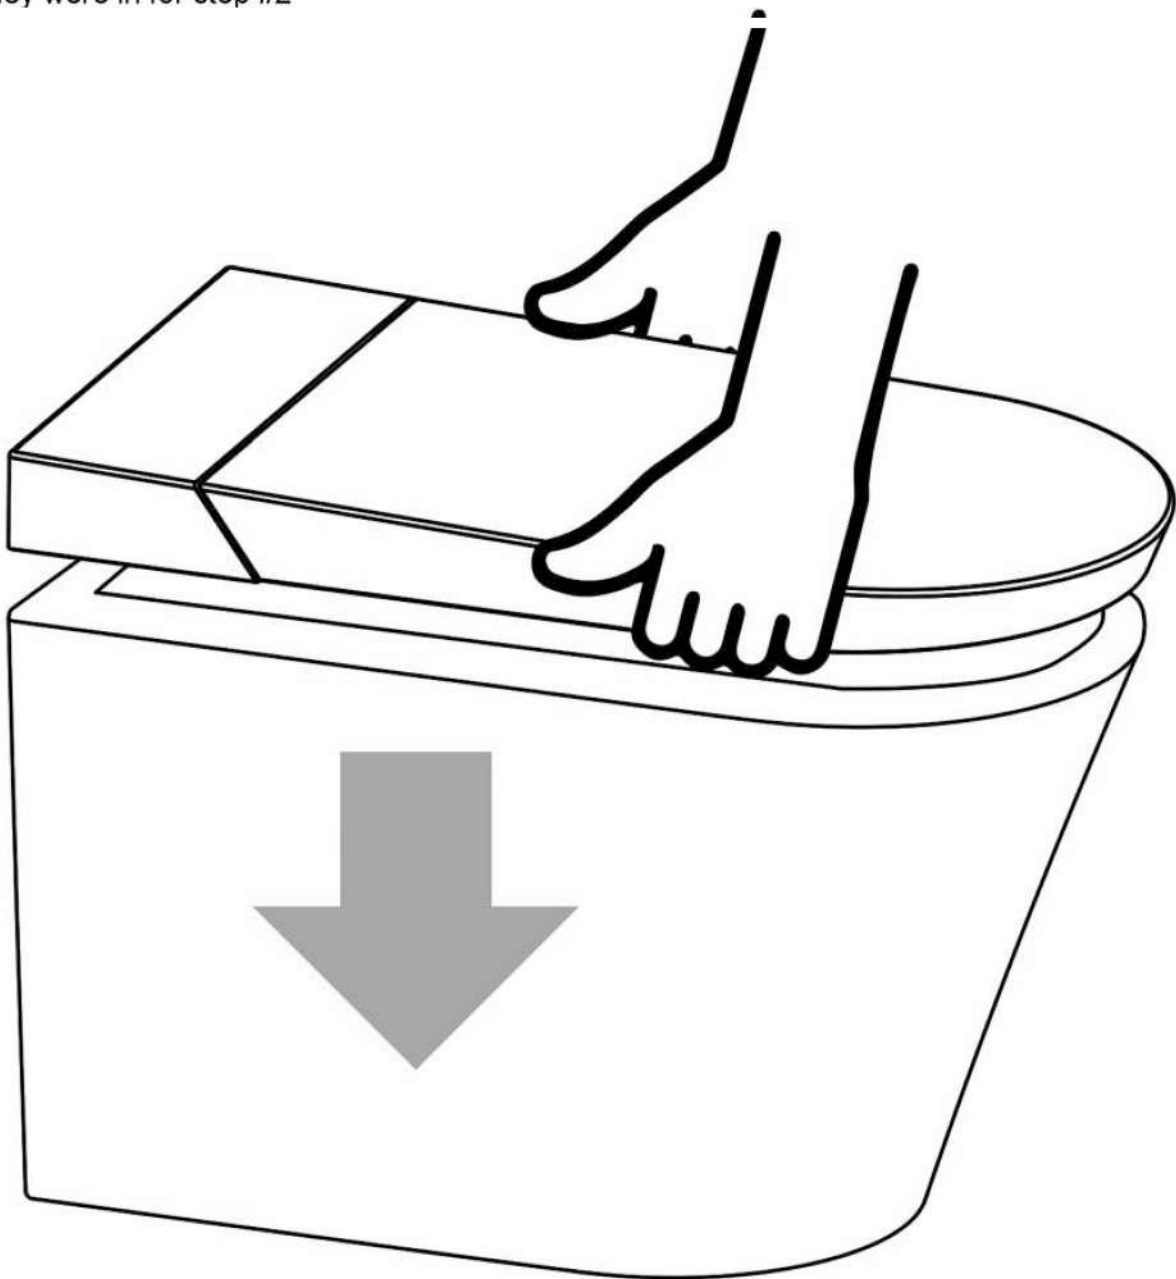

11. Plug in the cord and reset the GFCI by pushing the larger of the two buttons on the plug.
** If there is power to the Electronic bidet, It will automatically run through a cleaning cycle to insure all functions are working properly.


INSTALLING THE WATER SUPPLY

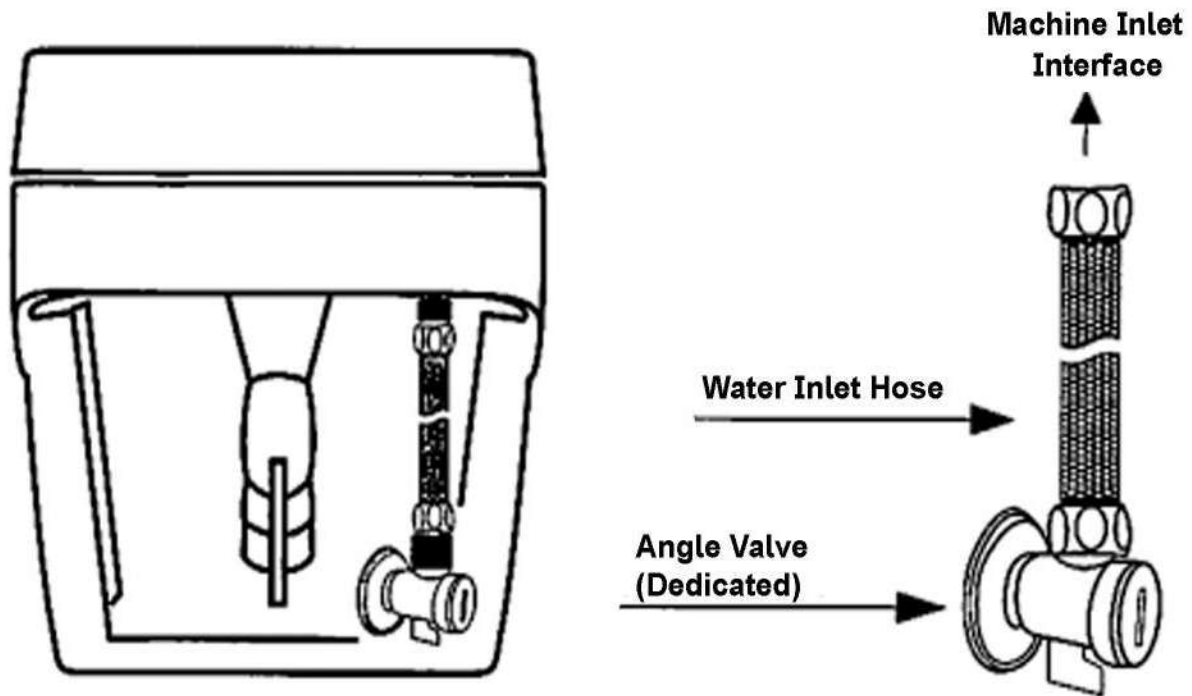

STEPS:

1. Drain the dirt in the pipe before the installation of the toilet.
2. Install the special angle valve in the accessories into the tap water pipe.
3. Connect the valve with the inlet hose.
4. Open the valve to check water leakage in all parts.

Notice: The dirt in the water pipe may clog the inner spool of the product and seriously affect its function. PE pipe's material is plastic. Please avoid using it under direct sunlight or in environments with high temperature. We recommend to replace it every two years.

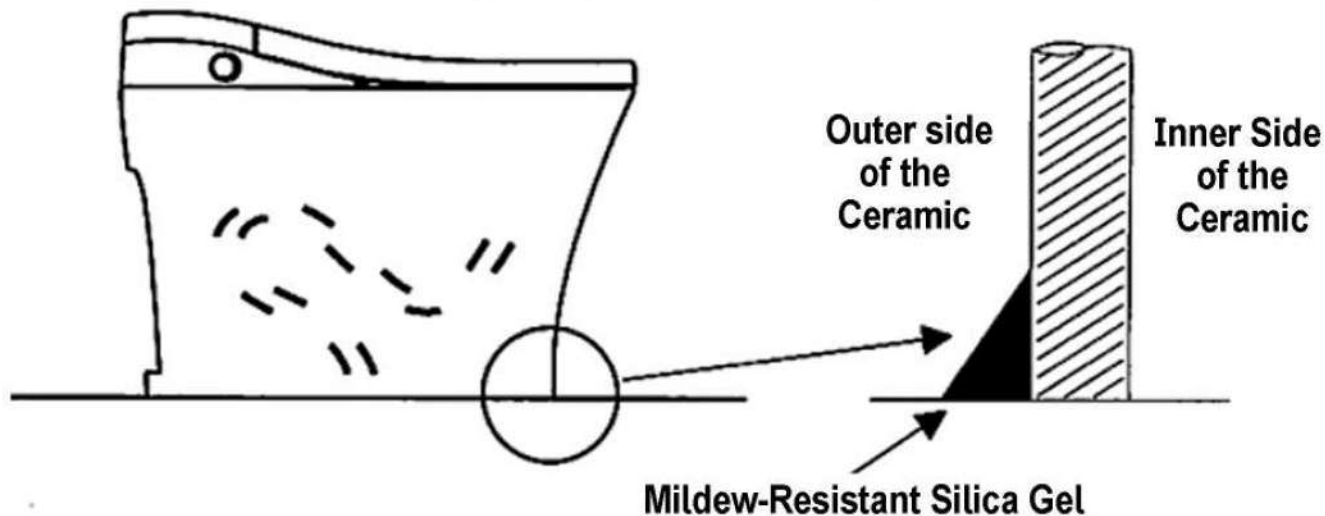


REMINDERS FOR INSTALLATION

1. Please do not put cement mortar into the front cavity or any other cavities of the ceramic. It may break the bottom of the toilet when the cement congeal.
2. Please do not flush newspapers, diapers, sanitary towels, or other objects which can easily block the drain outlet.
3. It can not be used under 0 degree Celcius otherwise, the frozen water may break the ceramic up.
4. To avoid damage and water leakage, avoid large impact to the ceramic material caused by hard and heavy objects.
5. To keep the toilet's outer surface clean, please use nylon brush, soap suds, or neutral detergent in cleaning the toilet. No steel brush and strong causticity solution as it may destroy the glaze of the ceramic and cause erosion to the pipeline.

Note: Trone is not held responsible for the losses caused by incorrect installation and listed incorrect actions.



TOILET SEAT INSTALLATION

1. Remove the toilet seat from the toilet bowl.
2. Unscrew the water connection hose from the toilet and the toilet seat.
3. Place the wax ring under the toilet.

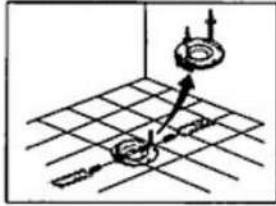


4. Position the toilet onto the floor flange. Make sure the fixing bolts are aligned with the toilet holes.

5. Using a ratchet, tightly screw the nuts to the fixing bolts.

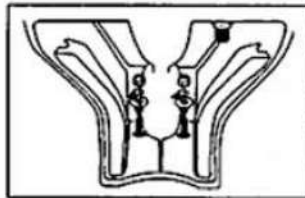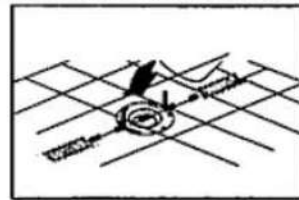

6. Re-install the toilet seat.

REMOTE CONTROL INSTALLATION

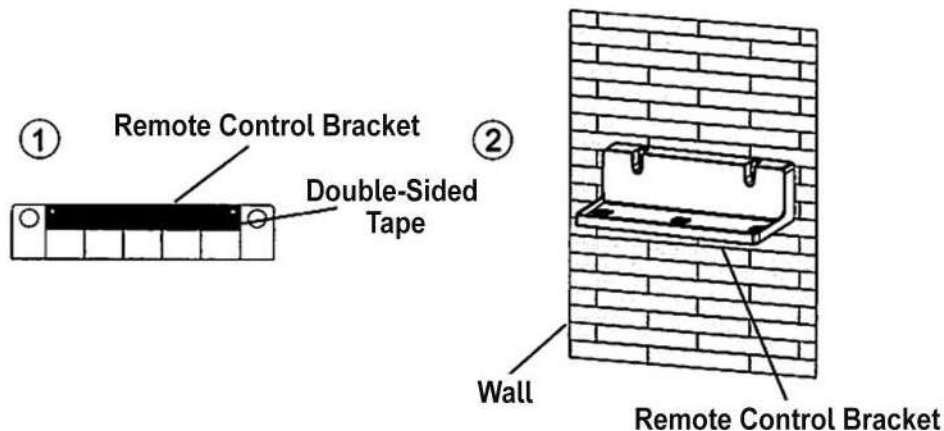

Tear the paper of the double-sided tape on the back of the bracket. Stick the bracket on the wall.

Note: Clean the installation area before pasting. Strongly and evenly press the tape when pasting. Use it after 15 minutes.

TRONE

Installation Guide for
Electronic Bidet with
Integrated Toilet

A2ETBCERN-12.WH

AQUATINA II

